


Natura 07

OPTICAL & SOLAR PROPERTIES

	Single Pane
Visible Light Transmitted	7 %
Visible Light Reflected (Int)	11 %
Visible Light Reflected (Ext)	14 %
Ultra Violet Block	99 %
Total Solar Energy Reflected	20 %
Total Solar Energy Transmitted	12 %
Total Solar Energy Absorbed	68 %
Emissivity (Room Side)	0.78
Glare Reduction	92 %
Shading Coefficient	0.35
Solar Heat Gain Coeff. (G-Value)	0.30
U-Value Winter (IP)	1.01
U-Value Winter (SI)	5.73
Luminous Efficacy	0.20
Total Solar Energy Rejected	70 %

R058L7W - Natura 07 Water Activated Adhesive

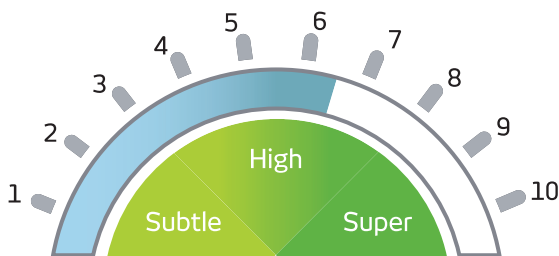

Energy Savings


Natura 15

OPTICAL & SOLAR PROPERTIES

	Single Pane
Visible Light Transmitted	16 %
Visible Light Reflected (Int)	11 %
Visible Light Reflected (Ext)	9 %
Ultra Violet Block	99 %
Total Solar Energy Reflected	10 %
Total Solar Energy Transmitted	15 %
Total Solar Energy Absorbed	75 %
Emissivity (Room Side)	0.86
Glare Reduction	83 %
Shading Coefficient	0.44
Solar Heat Gain Coeff. (G-Value)	0.38
U-Value Winter (IP)	1.05
U-Value Winter (SI)	5.8
Luminous Efficacy	0.36
Total Solar Energy Rejected	62 %

R058L9W - Natura 15 Water Activated Adhesive

WERS and NFRC pending

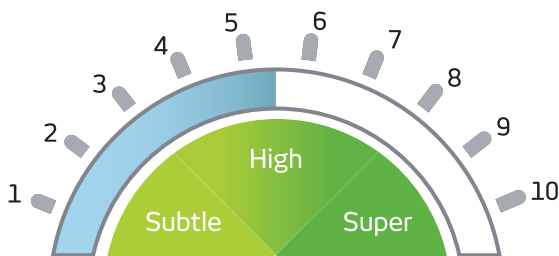

Energy Savings


Natura 28

OPTICAL & SOLAR PROPERTIES

	Single Pane
Visible Light Transmitted	31 %
Visible Light Reflected (Int)	9 %
Visible Light Reflected (Ext)	14 %
Ultra Violet Block	99 %
Total Solar Energy Reflected	15 %
Total Solar Energy Transmitted	33 %
Total Solar Energy Absorbed	52 %
Emissivity (Room Side)	0.87
Glare Reduction	65 %
Shading Coefficient	0.56
Solar Heat Gain Coeff. (G-Value)	0.48
U-Value Winter (IP)	1.05
U-Value Winter (SI)	6.00
Luminous Efficacy	0.55
Total Solar Energy Rejected	52 %

R069L8W - Natura 28 Water Activated Adhesive

WERS and NFRC pending

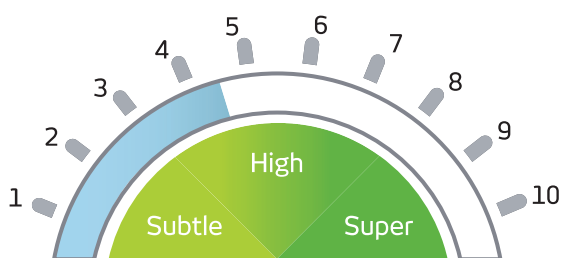

Energy Savings

energy efficiency

solar zone

Hanita Coatings

DS No. 1180, Ed A, Sept 2013